



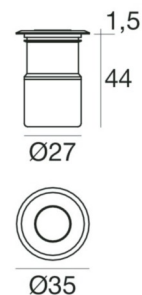

Uplights | 1 x powerLED 2,0 W 630 mA | CRI 80  
**93127W60**



Datos técnicos	
Posición de instalación	Piso
Ambiente de instalación	Exteriores
Fuente de luz	LED
Óptica	Flood
Potencia	2 W
Flujo luminoso (fuente)	208 lm
Current intensity	630mA
CCT / Tonalità	3000 K
Índice de rendimientos cromático	80 Ra
C.C. / C.V.	CC
Clase de aislamiento	3
IP	IP67
Test del hilo incandescente	850°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
ETL	No
Operating temperature	-20°C / +50°C
Driver incluido.	No
Induzione	No
Modo emergencia.	No
Orientabilidad	No
Basculación	No
Practicabilidad	Sí
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	1 m
Resinado	Sí

Acabado cuerpo	
Material	Latón
Color	níquel
Elaboración	Cepillado

Electrónica		
	On/Off Driver	89420
	On/Off Driver	99186
	On/Off Driver	99179

Uplights | 1 x powerLED 2,0 W 630 mA | CRI 80  
**93127W60**

Single emission uplights for outdoor application. The warm white LED light source with a flood light distribution is composed of 1 powered LED with CCT of 3000 K and a CRI 80; the source luminous flux is 208 lm, with a 104.0 lm/W nominal luminous efficacy.



The device body is made of brass and features a nickel finish, processed by means of brushing. The ingress protection degree is IP67; the total weight is of 0.174 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2,0 W. The power supply cable is included and features.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Características Luminotécnicas	
Light Output Ratio (LOR)	87 %
Flujo luminoso (fuente)	208 lm
Flujo luminoso de luminaria	182 lm
Consumption	2,0 W
Rendimiento luminoso de las luminarias	91 lm/W
Temperatura de color	3000 K
Índice de rendimientos cromático	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 28
UGR axial	> 28

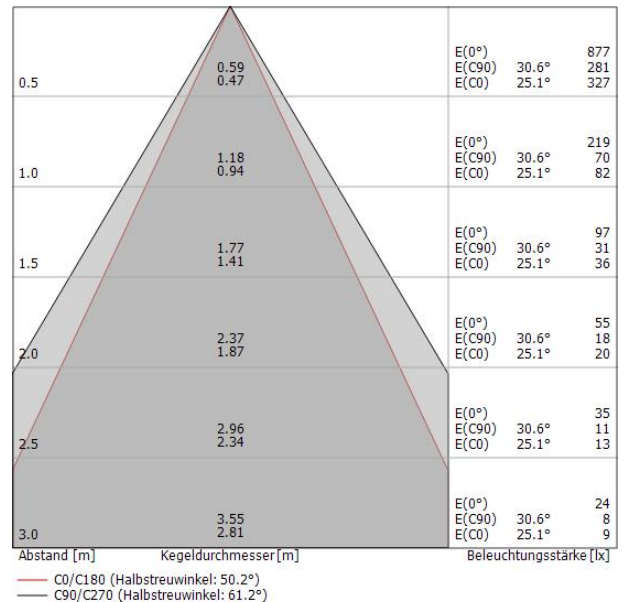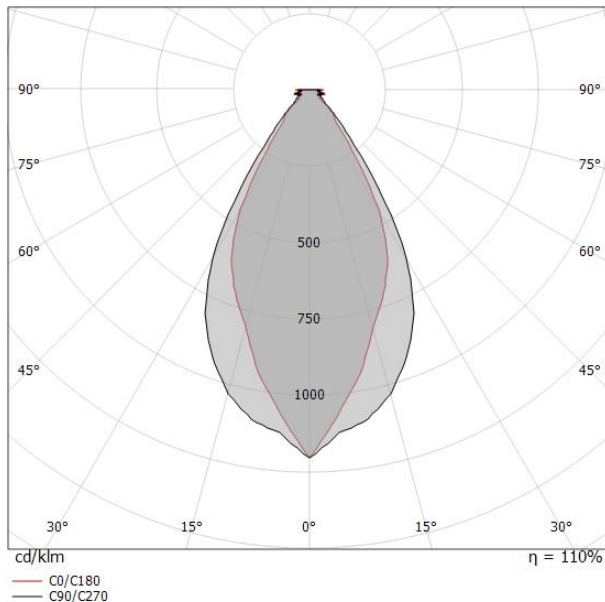



Beret\_2R | Uplights | Accessories  
**93127W60**



Caja de empotrar  
L=87mm, H=60mm, D=60mm

**Code**  
84918